

P/N: VS70-3

Copyright

© 2014, FLIR Systems, Inc.

All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of FLIR Systems and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

Document identity

Publ. No.: VS70-3

Release: -

Commit: 13554

Language:

Modified: 2014-04-24

Formatted: 2014-04-24

Corporate Headquarters

FLIR Systems, Inc.

27700 SW Parkway Ave.

Wilsonville, OR 97070

USA

Telephone: +1-503-498-3547

Website

<http://www.flir.com>

Customer support

<http://support.flir.com>

Disclaimer

Specifications subject to change without further notice. Camera models and accessories subject to regional market considerations. License procedures may apply. Products described herein may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions.



The Articulation Combo (Wired), Long Focus kit includes the VS70, a wired handset, and a dedicated 6 mm long-focus camera with two-way articulation on a 1 m semi-rigid cable. Long focus provides an increased viewing distance, and articulation provides greater internal camera control.

| | |
|--|---|
| SAP description | Articulation Combo (Wired), Long Focus |
| Kit contents | VS70 + VSA2-1 |
| VS70 main unit general data | |
| LCD screen | 145 mm (5.7"), 135 mm (5.3") viewable |
| Active matrix | Active matrix, 640 × 480 pixels |
| Memory type | SD card 4 GB included (32 GB maximum) |
| Compression format | MPEG4 |
| Still image format | JPEG (640 × 480 pixels) |
| Video recording format | AVI (640 × 480 pixels) |
| Video output format | NTSC and PAL, frame rate 30 fps |
| Multi-language menu | Yes |
| Receiver frequency | 2.4 GHz |
| Receiver sensitivity | -87 dBm (SNR = 42 dB, $F_{mod} = 15$) |
| Data/video | Mini USB 1.1 and AV out |
| Audio | Earphone plug, 3.5 mm, 4 rings |
| Speaker | 15 mm, 32 Ω, 20 Hz to 20 kHz |
| Microphone | Boom microphone 6 mm × 5 mm (0.24" × 0.2"), total length 10 cm (3.9"), Wire length 1.2 m (3.9') |
| Tripod mount | On rear, accepts standard tripod screw |
| Certifications | FCC, CE |
| Warranty | 2 years, see website for details |
| VS70 main unit power system | |
| Battery | 3.7 V rechargeable lithium polymer |
| Battery life | 6–8 hours |
| Power adapter | 100–240 V input/5 V DC output |
| Battery status indication | Progressive with auto power off (APO) |
| VS70 main unit environmental data | |
| IP rating | 67 |



Wired Articulation Camera Videoscope Combo

P/N: VS70-3

© 2014, FLIR Systems, Inc.

#VS70-3; r. -/13554;

| | |
|---|---|
| Drop test | 2 m |
| Operating temperature | –10 to 60°C (14 to 140°F) |
| Operating humidity | 80% maximum |
| Storage temperature | –40 to 80°C (–40 to 176°F) |
| VS70 main unit physical data | |
| Product weight | 1.57 kg (3.46 lb.), including batteries |
| Product dimensions | 241 mm × 178 mm × 70 mm (9.5" × 7" × 2.75") |
| Material | PC-ABS, rubber hand grip, nylon strap |
| Color | Gray and black |
| Camera VSA2-1 (two-way 6 mm articulated camera with 1 m probe) | |
| Diameter | 6 mm |
| Resolution | VGA (640 × 480 pixels) |
| Probe length | 1 m |
| Focal length | 65 mm to infinity |
| Field of view | 56° |
| Articulation | Two-way 240 ± 20° manual tip articulation |
| Integrated handset | Yes |
| Wireless capabilities | No |
| Compatible main unit | VS70 |
| Compatible wireless handset | N/A |
| Compatible detachable cameras | N/A |
| Warranty | 2 years |
| Imaging sensor | CMOS |
| Video format | NTSC |
| Brightness control | Manual with variable options |
| Lamp type | LED |
| Operating temperature | –10 to 50°C (14 to 122°F) |
| Power requirements | N/A |
| Shipping information | |
| Packaging type | Brown shipping box over hard case |
| Packaging contents | VS70 main unit, VSA2-1 (two-way 6 mm articulated camera with 1 m probe), VSA-60 (6 mm camera accessories: mirror, anti-snag tip, magnet), patch cable, 4 GB SD card, USB/video out cables, power adapters, vehicle charger, headset, neck strap, cleaning kit, VS-HC (VS70 hard case with camera storage), and user manual (printed English and translated on CD) |
| Packaging weight | 7.5 kg |
| Packaging dimensions (H × W × L) | 53 cm × 43.5 cm × 22 cm |
| Carton weight | 16 kg |
| Carton dimensions (H × W × L) | 55 cm × 46.5 cm × 46 cm |
| Carton quantity | 2 |
| EAN-13 | 7332558007433 |
| UPC-12 | 793950400746 |
| Country of origin | TW |



Wired Articulation Camera Videoscope Combo

P/N: VS70-3

© 2014, FLIR Systems, Inc.

#VS70-3; r. -/13554;

| | |
|--|--|
| Tariff code | 9013809000 |
| Technical support | |
| Website | http://support.flir.com |
| E-mail | T&Msupport@flir.com |
| Phone | 855-499-3662 |
| Repairs | repair@flir.com |
| Manual Languages (on CD and web) | Czech, Danish, German, Greece, English (US), Spanish (Spain), Finnish, French (France), Hungarian, Italian, Japanese, Korean, Bokmal Norwegian (Norway), Dutch Flemish (Netherlands), Polish, Portuguese (Portugal), Russian, Swedish, Chinese, Chinese (Taiwan) |
| Suggested cameras and accessories | |
| VST | Wireless handset |
| VS-2PC | 2 m patch cable |
| VSA2-1-W | Wireless two-way 6 mm articulated camera with 1 m probe |
| VSC65-17S | 17" stainless steel rigid probe |
| Compatible cameras full list | |
| VSA2-2M-W | Wireless two-way 6 mm articulated camera with 2 m probe via SF |
| VSA2-2-W | Wireless two-way 6 mm articulated camera with 2 m probe |
| VSA2-1M-W | Wireless two-way 6 mm articulated camera with 1 m probe via SF |
| VSA2-2 | Two-way 6 mm articulated camera with 2 m probe |
| VSA2-2M | Two-way 6 mm articulated camera with 2 m probe via SF |
| VSA2-1 | Two-way 6 mm articulated camera with 1 m probe |
| VSA2-1M | Two-way 6 mm articulated camera with 1 m probe via SF |
| VSC2-58-1FM | Two-channel Camera, 5.8 mm diameter 1 m probe |
| VSC58-30M | 5.8 mm camera with 30 m FG probe—QVGA via SF |
| VSC58-20M | 5.8 mm camera with 20 m FG probe—QVGA via SF |
| VSS-30 | 30 m plumbing spool |
| VSS-20 | 20 m plumbing spool |
| VSC28 | 28 mm camera head for spool |
| VSC25 | 25 mm camera head for spool |
| VS-BR25 | Centering brush for VS70 camera probes |
| VS-BR28 | Centering brush for VS70 camera probes |
| VS-RB | Replacement centering brush |
| VSC65-12S | 12" stainless steel rigid probe |
| VSC41-2RM | 4.1 mm camera with 2 m SR probe—QVGA via SF |
| VSC39-1FM | 3.9 mm camera with 1 m flex probe—QVGA via SF |
| VSC58-2R | 5.8 mm camera with 2 m SR probe—VGA via LF |
| VSC58-2RM | 5.8 mm camera with 2 m SR probe—VGA via SF |



Wired Articulation Camera Videoscope Combo





P/N: VS70-3

© 2014, FLIR Systems, Inc.

#VS70-3; r. -/13554;

| | |
|-----------|--|
| VSC58-1R | 5.8 mm camera with 1 m SR probe—VGA via LF |
| VSC58-1RM | 5.8 mm camera with 1 m SR probe—VGA via SF |
| VSC80-2R | 8 mm camera with 2 m SR probe—VGA via LF |
| VSC80-1R | 8 mm camera with 1 m SR probe—VGA via LF |

© 2014, FLIR Systems, Inc. All rights reserved worldwide. No part of this drawing may be reproduced, stored in a retrieval system, or transmitted in any form, or by any means, electronic, mechanical, photocopying, recording, or otherwise, without written permission from FLIR Systems, Inc. Specifications subject to change without further notice. Dimensional data is based on nominal values. Products may be subject to regional market considerations. License procedures may apply. Product may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions. Diversion contrary to US law is prohibited.

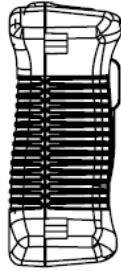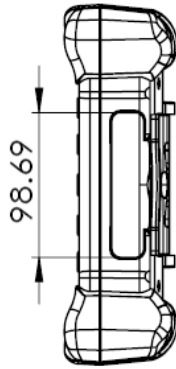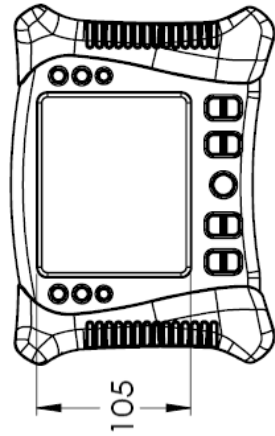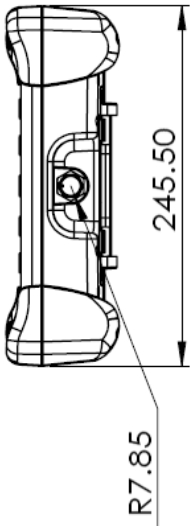

| Modified Date | Modified By |
|------------------------|-----------------|
| Monday, April 21, 2014 | T&M Engineering |
| Description | |
| FLIR VS70, Units in mm | |

