

## Nedo laser mEssfix<sup>30</sup>



Laser distance meter for smart craftsman

Ref.-No. 705 550

### Features:

- Single or continuous measuring
- Area and volume calculation
- Pythagoras function
- Measuring from the front and back edge of the device.
- Calculator function (+/-)
- Clearly, doublespaced display
- Small, handy and robust



Technical data:	
Typ. measuring accuracy	± 2.0 mm
Measuring range	0.1 m - 30 m
Units	mm, ft, inch
Laser	laser class 2, 635 nm, < 1 mW
Automatic switch-off	after approx. 3 minutes
Power supply	2 x 1.5 V type AAA batteries
Dimensions	123 mm x 50 mm x 26 mm
Weight	100 g

## Nedo laser mEssfix<sup>50</sup>



Laser distance meter for ambitious professionals

Ref.-No. 705 540

### Features:

- Single or continuous measuring
- Area and volume calculation
- Pythagoras function
- 4 different measuring references
- Adding, subtracting, storing and retrieval of measurements
- Bubble
- Continuous laser beam for exact sighting
- Small, handy and robust



Technical data:	
Typ. measuring accuracy	± 1.5 mm
Measuring range	0.05 m - 50 m
Laser	laser class 2, 635 nm, < 1 mW
Protection class	IP 54
Power supply	4 x 1.5 V, type Micro/AAA batteries or 4 x 1.2 V, type/AAA rechargeable batteries
Dimensions	102 mm x 58 mm x 33 mm
Weight	186 g

## Leica DISTO™



**Leica DISTO™ D2**  
DISTO™ D2 – the laser distance meter with extremely compact dimensions. With many measuring functions, illuminated display and a multi-functional endpiece.



Ref.-No. 705 547



**Leica DISTO™ D3**  
DISTO™ D3, the small laser distance meter. Optimum functionality including inclination measurement, area and volume measurement, minimum/maximum measuring and continuous measuring. Supplied with multi-functional endpiece, target board and illuminated display.



Ref.-No. 705 546



**Leica DISTO™ D5**  
The world innovation with digital viewfinder and 4 x zoom. Many measuring functions can be read of quick and easy from the high resolution color display. Optimal for exterior applications and to measure long distances.



Ref.-No. 705 548



**Leica DISTO™ D8**  
DISTO™ D8 is the High-End laser distance meter. With digital viewfinder and 4 x zoom for exterior applications. The Bluetooth port allows the wireless data transfer to a Pocket PC / PC.



Ref.-No. 705 549

## Laser distance meters

Technical data:	laser mEssfix <sup>30</sup>	laser mEssfix <sup>50</sup>	DISTO™ D2	DISTO™ D3	DISTO™ D5	DISTO™ D8
Typ. measuring accuracy	± 2.0 mm	± 1.5 mm	± 1.5 mm	± 1.0 mm	± 1.0 mm	± 1.0 mm
Measuring range	0.1 m - 30 m	0.05 m - 50 m	0.05 m - 60 m	0.05 m - 100 m	0.05 m - 200 m	0.05 m - 200 m
Continuous measuring	✓	✓	✓	✓	✓	✓
Minimum/maximum measuring	✓	✓	✓	✓	✓	✓
Area and volume measurement	✓	✓	✓	✓	✓	✓
Indirect distance measurement (Pythagoras)	✓	✓	✓	✓	✓	✓
Addition, subtraction	✓	✓	✓	✓	✓	✓
Inclination sensor	✓	✓	± 45°	± 45°	± 45°	360°
Built-in bubble	✓	✓	✓	✓	✓	✓
Positioning pin/multifunctional end-piece	✓	✓	✓	✓	✓	✓
Color display	✓	✓	✓	✓	✓	✓
Digital viewfinder (4x zoom)	✓	✓	✓	✓	✓	✓
Bluetooth® interface	✓	✓	✓	✓	✓	✓
Tripod thread	✓	✓	✓	✓	✓	✓
Protection class	IP 40	IP 54	IP 54	IP 54	IP 54	IP 54
Dimensions	123x50x26 mm	102x58x33 mm	111x42x23 mm	125x45x24 mm	143.5x55x30 mm	143.5x55x30 mm
Weight	100 g	186 g	90 g	110 g	195 g	205 g

Laser distance meters on a view!



Your Nedo distributor



Customer satisfaction is the yardstick of our activities – our name governs our quality.



**Precise surveying and measuring**

Nedo GmbH & Co. KG  
Hochgerichtstrasse 39-43 • D-72280 Dornstetten  
Germany  
Phone: +49/74 43/24 01-0 • Fax: +49/74 43/24 01-45  
info@nedo.com

[www.nedo.com](http://www.nedo.com)

# Measuring tools for interior finishing

The latest measurement technology for professional applications



**Precise surveying and measuring**

Printed in Germany 05/09 NP 520 011-EN



## Nedo mEssfix compact

Measure interior dimensions quickly and reliably with the lightweight and handy telescopic measuring stick Nedo **mEssfix compact**. Simply place the **mEssfix compact** in position, pull out the extending sections and conveniently read off the measurement from the analogue display.

### Features:

- Compact dimensions
- Robust display housing made of impact resistant plastics
- Horizontal and vertical spirit levels
- Robust circular tubes for tough conditions on the construction site



Case included as a standard

F 380 211 F 580 211


Nedo <b>mEssfix compact</b>	Length retracted	Graduation	Weight
Ref.-No. F 380 211	0.60 m to 3.04 m	0.60 m mm	0.9 kg
Ref.-No. F 580 211	0.91 m to 5.01 m	0.91 m mm	1.4 kg

## Nedo mEssfix

The Nedo **mEssfix** is a thoroughly tried-and-tested telescopic rule, which is designed for measuring the widths of openings.

The handling is child's play: Place the **mEssfix** in the desired position, pull out the extending sections and conveniently read off the measured value from the analogue display.

### Nedo mEssfix - the original



Internal measurements taken in seconds

F 381 111 F 380 112 F 480 111 F 580 111


Nedo <b>mEssfix</b>	Measuring range	Length retracted	Graduation	Weight
Ref.-No. F 180 111	0.37 m to 1.00 m	0.37 m	mm	0.7 kg
Ref.-No. F 280 111	0.53 m to 2.00 m	0.53 m	mm	0.9 kg
Ref.-No. F 380 112	0.70 m to 3.00 m	0.70 m	mm	1.1 kg
Ref.-No. F 380 113	0.70 m to 3.00 m	0.70 m	mm/inch	1.1 kg
Ref.-No. F 480 111	0.86 m to 4.00 m	0.86 m	mm	1.4 kg
Ref.-No. F 480 113	0.86 m to 4.00 m	0.86 m	mm/inch	1.4 kg
Ref.-No. F 580 111	1.07 m to 5.00 m	1.07 m	mm	1.7 kg
Ref.-No. F 580 115	1.07 m to 5.00 m	1.07 m	mm/inch	1.7 kg

### Nedo mEssfix with points for roller shutter constructors

Ref.-No. F 281 111	0.63 m to 2.10 m	0.63 m	mm	1.0 kg
Ref.-No. F 381 111	0.80 m to 3.10 m	0.80 m	mm	1.2 kg
Ref.-No. F 481 111	0.96 m to 4.10 m	0.96 m	mm	1.5 kg
Ref.-No. F 581 111	1.17 m to 5.10 m	1.17 m	mm	1.8 kg

## Nedo mEssfix-S

With a measuring range of up to 8 m the extra robust Nedo **mEssfix-S** helps the craftsman to measure great lengths in numerous areas of the building industry. Clamping screws securely lock the desired height of the Nedo **mEssfix-S**. The display with integrated bubbles is attached on the upper end of the rod which allows for a convenient read-off.

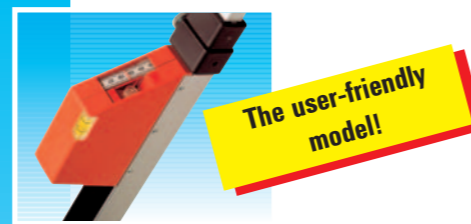

The user-friendly model!

5 m 6 m 8 m

Nedo <b>mEssfix-S</b>	Measuring range	Length retracted	Weight
Ref.-No. F 580 151	1.03 m to 5.00 m	1.03 m	2.0 kg
Ref.-No. F 680 151	1.20 m to 6.00 m	1.20 m	2.4 kg
Ref.-No. F 880 151	1.53 m to 8.00 m	1.53 m	2.6 kg

## Nedo mEsstronic Easy

The Nedo **mEsstronic Easy** is an easy-to-use electronic length measuring tool for the skilled trades. Simply place the **mEsstronic Easy** in position, pull out the extending sections, and read off the measurements from the digital display.



Ref.-No. 583 121

### Features:

- Hold function: permits use in almost inaccessible places and read-off when convenient
- Zero function: fixes reference points for relative measurements
- Clearly laid out and easy-to-use panel

Nedo <b>mEsstronic Easy</b>	Measuring range	Length retracted	Graduation	Weight
Ref.-No. 583 121	0.70 m to 3.00 m	0.70 m	mm	1.3 kg
Ref.-No. 585 121	1.04 m to 5.00 m	1.04 m	mm	2.0 kg

## Nedo Winkelfix

Fast and precise measurement of angles – no problem with the Nedo Winkelfix! Simply place the Nedo Winkelfix in position, and the angle in degrees is shown rapidly and accurately in the analogue display.



Ref.-No. 450 121



Ref.-No. 450 111

Nedo Winkelfix – proven thousands of times!

Ref.-No. 500 111



Ref.-No. 510 111



The angles set can be read off from the analogue display.

Nedo Winkelfix	Shank length	Graduations	Measuring range	Compass points	Weight
Ref.-No. 450 111 mini	430 mm	degrees	0 to 180°	no	0.9 kg
Ref.-No. 450 121 classic	600 mm	degrees	0 to 180°	no	1.2 kg
Ref.-No. 500 101 shorty	305 mm	degrees	0 to 180°	no	0.7 kg
Ref.-No. 500 111 maxi	600 mm	degrees	0 to 180°	yes	1.2 kg
Ref.-No. 510 111 long	1500 mm	degrees	0 to 180°	yes	2.5 kg

## Nedo Winkeltronic »Easy«

Digital angle measuring tool to conveniently measure and transfer angles.



### Features:

- Resolution: 0.1°
- Accuracy: ± 0.2°
- Hold function holds a value on the display



Case included as a standard

- Zero adjustment at any shank angle
- Horizontal and vertical spirit levels
- Automatic switch-off can be deactivated
- Case included as a standard

Ref.-No. 405 100

Nedo Winkeltronic	Shank length	Resolution	Accuracy	Measuring range	Weight
Ref.-No. 405 100	400 mm	0.1°	± 0.2°	0° to 200°	0.65 kg

## Nedo Winkeltronic

State-of-the-art angle measuring technology for every requirement.



Ref.-No. 405 315



Ref.-No. 405 215



### Features:

- Resolution: 0.1°
- Accuracy: ± 0.1°
- Hold function holds a value on the display
- Zero adjustment at any shank angle
- Symmetrical arrangement of the shanks permits optimum positioning
- Horizontal and vertical bubble

Nedo Winkeltronic	Shank length	Resolution	Accuracy	Measuring range	Weight
Ref.-No. 405 215	450 mm	0.1°	± 0.1°	0° to 352°	0.90 kg
Ref.-No. 405 315	600 mm	0.1°	± 0.1°	0° to 355°	1.20 kg

## Nedo LaserWinkeltronic

The Nedo LaserWinkeltronic combines the advantages of laser technology with the proven technology of the Winkeltronic.

### Features:

- Resolution: 0.1°
- Accuracy: ± 0.1°
- Measuring range: 0° to 360°
- Operation duration: approx. 30-40 h
- Hold function
- Horizontal and vertical spirit levels



Ref.-No. 460 612

### Laser features:

- Accuracy: ± 0.5 mm
- Visible red laser beam, wavelength 670 nm
- Laser class: 2
- Beam diameter: 6 mm
- Range: approx. 20 m, depending on surrounding conditions
- Operation duration: approx. 10 h



Shank length 20 m

Nedo LaserWinkeltronic	Laser modules	Shank length	Resolution	Measuring range	Weight
Ref.-No. 460 612	2	605 mm	0.1°	0° to 360°	1.5 kg
Ref.-No. 460 613	1	605 mm	0.1°	0° to 360°	1.4 kg

## Nedo Inclinometer Level

The Nedo inclinometer level is designed for easy measurements of inclinations, slopes and angles. Measured values are displayed alternatively in degrees or percent.

### Features:

- Digital display inverts automatically for overhead measuring
- Audible signal at 0° and 90°
- Automatic switch-off after approx. 5 min.
- Hold function to hold a reading on the display



Ref.-No. 508 110 (length: 600 mm)  
Ref.-No. 508 111 (length: 800 mm)

Technical data:	
Measuring range	360°
Degrees display	in 0.1° increments
Percent display	in 0.1% increments
Accuracy	± 0.2°
Length	600 mm / 800 mm
Weight	0.7 kg / 0.8 kg